

Job Name: Jongsma double for order

Quote Date: 03/16/2021

Manufacturer's Estimated Lead Time: 3-4 Weeks

Account Manager: Jessica Elder

Dealer

Builders FirstSource - Clearwater
13750 Us Hwy 19 N
Clearwater, FL 33764

Customer

DELIVERY BY BFS TO
851 BRIGHTWATERS
ST PETERSBURG
JOHAN JONGSMA 727-225-2475

Comments

****DOOR ORDER TO COME TO BFS CLEARWATER LOCATION. DELIVER TO JOBSITE AFTER CONFIRMING SCHEDULE WITH CLIENT****
DELIVER TO 851 BRIGHTWATERS BLVD NE ST PETERSBURG

Line	Label	Qty	UOM	Description	Unit	Extended
1	*same style as bamdoors**	1	EA	28 5/16 inch X 104 inch (Per Leaf), 1 3/4, TM1000, Swing, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, with Knockdown Jamb, Bevel Lock Side of Active Door, LH Active in Pair, Prime, Wedge	\$2,823.20	\$2,823.20

Panel Substitution = Replace All Panels with Glass
LVL Stiles = Yes
Glass = 1/4" Clear
T-Astragal = Astragal Supplied
Astragal Profile = Square T-Astragal

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore, Flushbolt

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 10 - Size: 4" x 4" - Corners: Square
Hinges = Locations: Hinge 1: 7", Hinge 2: 27-3/4", Hinge 3: 48-1/2",
Hinge 4: 69-1/4", Hinge 5: 90"
Hinges = Thickness: 0.130" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US15-Satin Nickel

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 68" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

Top Flushbolt = TruStile Installed
Top Flushbolt = Standard Flushbolt
Top Flushbolt = Extension: 18"
Top Flushbolt = Brand: Hager, Model: 282, Template: T-TA00177
Top Flushbolt = Flushbolt Finish: US15-Satin Nickel

Astragal/Door Edge Strike (Inactive Leaf) = Lock Bore Strike
Astragal/Door Edge Strike (Inactive Leaf) = 2-1/4" Radius Lip Strike

*****Knock Down Jamb Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Ogee
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****




Jamb Head Prep = Flushbolt Strike: SeeTemplate
Jamb Leg Prep = Hinge Prep: Standard Hinge

Comments

**DOOR WILL BE SHIPPED WITH KNOCK DOWN JAMB TO BE ASSEMBLED IN
FIELD DUE TO OVERSIZE DOORS** UNIT INCLUDES TWO DOOR SLABS, T-
ASTRAGAL WITH FLUSH BOLT AT HEAD, BALL BEARING HINGES, DOORS
PREPPED TO FIT INTO FRAME AT FACTORY** DOORS ARE PAINT GRADE
WHITE**

NO HANDLES INCLUDED WITH THIS PART OF ORDER - CAN BE ORDERED
SEPARATELY

Line	Label	Qty	UOM	Description	Unit	Extended
2		1	EA	Manufacturer's Freight for 2 Doors	\$192.31	\$192.31
					Tax (7.00%):	\$211.09
Total Units: 1					Total:	\$3,226.59

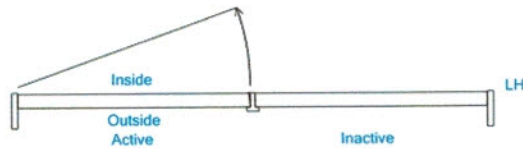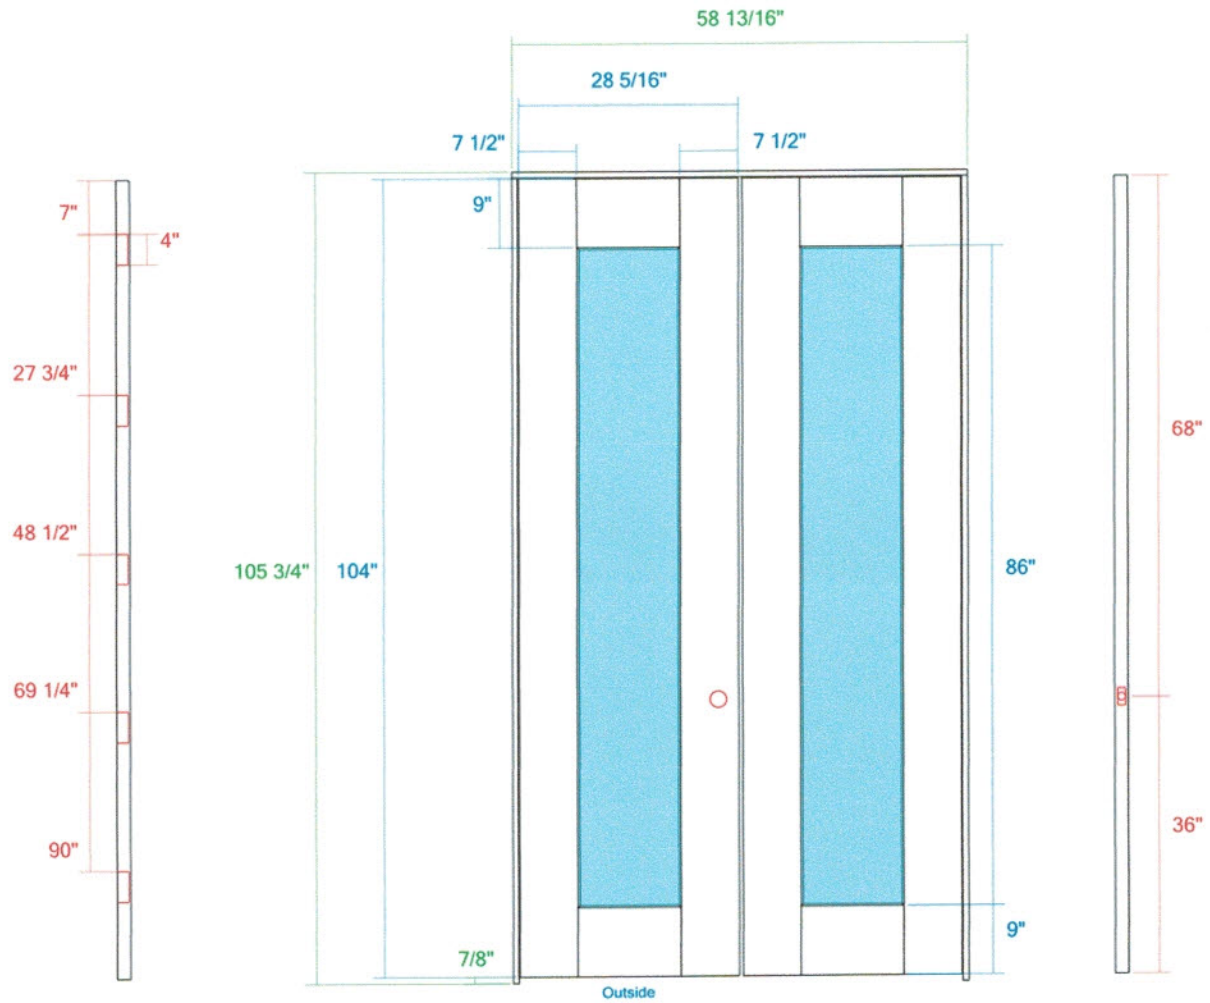

Jamb Width: 4 9/16"
Jamb Stop: Applied (OG)

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM1000	SS	NA	MDF	1/4" Clear	Non-Rated	Interior
Quote #: SQEK000903-2				Line #: 1 - *same style as barndoors**		
Builders FirstSource - Clearwater				Entered By: Jessica Elder		
Approval (sign here):				Created On: 03/16/2021		